



# T&G

## PLASTIC TONGUE

At CMPC we are committed to provide high quality products and offer an excellent service. That is why we have been developing SELEX PLYWOOD; a stable and reliable Plywood panel with high quality and amazing appearance.

- High visual appearance
- Easy to work with
- 100% Radiata Pine
- FSC<sup>®</sup> Certified product





La marca del  
manejo forestal  
responsable

\* Pregunte por nuestros productos  
con certificación FSC®

## PRODUCT BENEFITS AND APLICATIONS

- Board intended for structural use in the construction area.
- Easy handling due to their low weight - volume ratio.
- It's high physical-mechanical bending, shear and compressive strength coupled with a production based on phenol-formaldehyde low emissivity (E1) resin, favor its use indoors and outdoors controlled with a high thermal insulation.

## FEATURES


		
	Selex B	Selex C
Finishing		
Sanding grade	150	150
Natural defects		
Sound knots	Up to 25 mm. wide	Up to 40 mm. wide
Unsound knots	Repaired, up to 25 mm. wide	Up to 40 mm. wide
Knot holes	Not allowed	Up to 25 mm. wide
Pitch pockets	Up to 25 mm. wide	Allowed
Bark pockets	Not allowed	Allowed
Freckles	Allowed	Allowed
Machining defects		
Open splits	Up to 1 mm. wide	Up to 25 mm. wide
Open cracks	Up to 1 mm. wide	Up to 25 mm. wide
Fungal stains	Allowed	Allowed
Roughness	Allowed	Allowed
Repairs		
Inner splits in knots	Allowed	Unrepaired, up to 1 mm. wide
Routings with polyurethane	Occasionally	Not applicable
Putty patches	Allowed	Not applicable
Single wooden patches	Allowed	Not applicable
Double wooden patches	Allowed	Not applicable
Triple wooden patches	Allowed	Not applicable



Roofing



Flooring

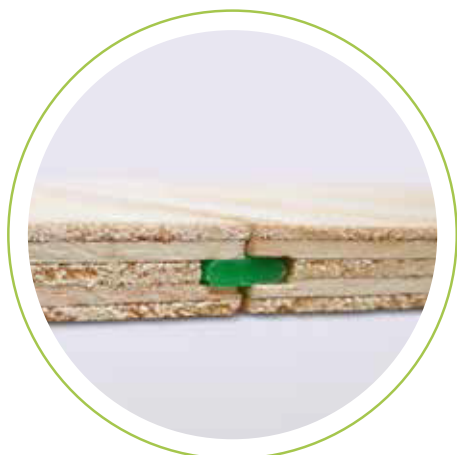

## GENERAL SPECIFICATIONS

Dimensions: 8' X 4' 1.200 x 2.400m	Thickness (mm)	15	18
	Thickness (inches)	19/32"	23/32"
	N° of plies	5	6/7
Density	480 – 550 kg / m <sup>3</sup>		
Adhesive	CARB 2 and E1 compliant		
Structural Certification	AS/NZS 2269		
Moisture Content	8% to 12 % for all boards		
Forestry Certification	FSC® certified product		