


BEADED PLYWOOD

At CMPC we are committed to provide high quality products and offer an excellent service. That is why have been developing SELEX PLYWOOD; a stable and reliable Plywood panel with high quality and amazing appearance.

PRODUCT BENEFITS AND APPLICATIONS


- Gives any project a sophisticated, refined look.
- Comes with a shiplap edge that allows for a precise installation.
- Ready to paint or stain.
- 2" on-center profile.
- CARB 2 compliant.

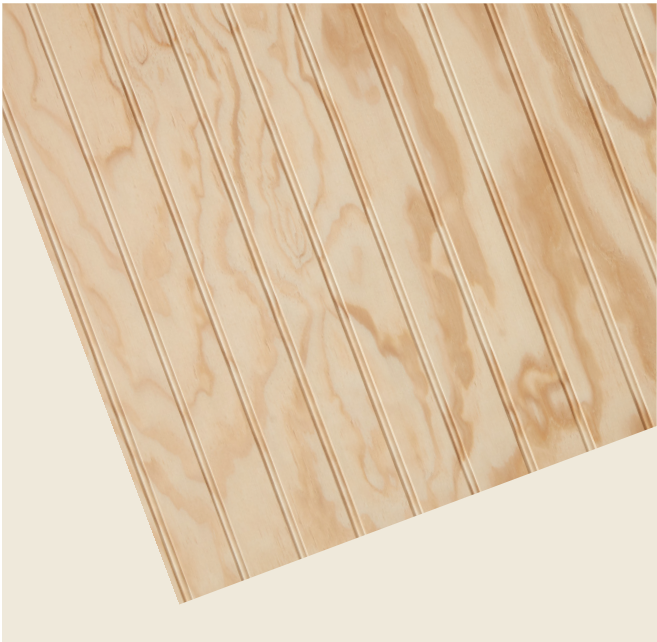


Deluxe Beaded



Selex C



Sterling Beaded



		STERLING BEADED	DELUXE BEADED	SELEX C
FEATURES	Solid face	SI	SI	NO
	Live knots	NO	SI	SI
	Dead knots	NO	NO	SI
	Routings with polyurethane	NO	NO	NO
	Putty patches	NO	SI	NO
	Wooden patches	NO	Occasionally	NO

BEAD PROFILE VIABILITY	
------------------------	--

GENERAL SPECIFICATIONS	THICKNESS (IN)	11/32
	THICKNESS TOLERANCES (IN)	min 0.328 max 0.360
	NUMBER OF VENEERS	3
	AVERAGE PANEL WEIGHT	30 lbs
	DENSITY	29.96 - 34.26 Lbs / ft ³ (480 - 550 kg / m ³)
	ADHESIVE	CARB 2 compliant
	STRUCTURAL CERTIFICATION	ANSI/APA PRP 210 SIDING (15mm)
	FORESTRY CERTIFICATION	FSC® certified product

Dimensions:
4' x 8' (1.22 x 2.44 m)

CMPC products come from our own radiata pine plantations, carefully cultivated to produce the highest quality wood and certified by responsible forest management by FSC® and PEFC.



Scan for more information



www.cmpcmaderas.com