

SIDING T1-24

- Special for decorative uses
- 100% Radiata Pine
- FSC® certified product


PRODUCT BENEFITS AND APPLICATIONS

- Ideal for both interior and protected exterior use
- Gives any Project a sophisticated and refined look.
- Has a multiple profiles available, offering suitable options for any Project
- Comes with a shiplap that allows for precise installation
- This profile has 24 grooves which have a width of 50 mm each

Selex Siding




Selex C



	SELEX SIDING	SELEX C
FEATURES		
SANDING GRADE	150	150
SOLID FACE	Si	No
LIVE KNOTS	Si	Si
DEAD KNOTS	No	Si
ROUTINGS WITH POLYURETHANE	No	No
PUTTY PATCHES	Si	No
WOODEN PATCHES	Occasionally	No

PROFILES AVAILABLE

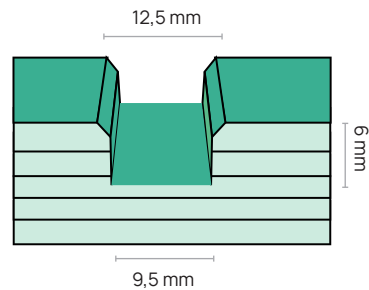

GENERAL SPECIFICATIONS

THICKNESS (MM)	12
Nº OF PLYS	5
DENSITY	480 - 550 kg / m ³
ADHESIVE	Europe: E1 / Netherlands: M1 (volatile organic compounds and low phenolformaldehyde emissions) / Australia: E super 0
MOISTURE CONTENT	8% to 12 % for all boards
FORESTRY CERTIFICATION	FSC®certified product

Dimensions
4' x 8' (1220 x 2440 mm)

CMPC products come from our own radiata pine plantations, carefully cultivated to produce the highest quality wood and certified by responsible forest management by FSC® and PEFC.



Scan for more
information



www.cmpcmaderas.com